

DESCRIZIONE - DESCRIPTION

Testa termostatica con sensore a liquido
 Thermostatic head with liquid sensor
 Tête thermostatique avec capteur liquide

P. Max 10 bar
 T. Max 100°C



2TT CC



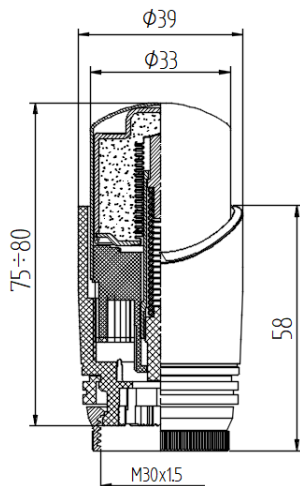
2TTBB



2TTNN

CARATTERISTICHE - FEATURES

- | | | | |
|---|---------|--|---------|
| • Tempo di risposta Response time Temps de réponse | 26 min | • Isteresi, Hysteresis, Hystérésis | 0.5 K |
| • Influenza della pressione differenziale Differential pressure influence Influence de la pression différentielle | 0.80 K | • Influenza della temp. dell'acqua Water temperature influence Influence de la temp. du fluide | 0.80 K |
| • Max pressione differenziale Max differential pressure Pression différentielle max | 1.0 bar | • Portata nominale Nominal flow rate Debit | 190 l/h |

DIMENSIONI PRINCIPALI - LEADING DIMENSIONS

**Campo regolazione temperatura
 Field temperature control**
